



## Wüstensand und Bodenfrost...

sind die zu messenden Medien und Ausgangspunkt für die richtige Wahl des Sensors. Der Bodensor (828) ist wasserdicht und wird zur präzisen Bestimmung von Wasser- oder Erdtemperaturen genutzt. Für die Temperatur, ca. 5 cm über dem Boden in Grashöhe, ist Gerät (8241), mit Strahlenschutz und Befestigungsstange, am besten geeignet. Weiter darüber, zur Messung der Lufttemperatur, hat sich der Einsatz des Sensors (8281) bewährt.

- weltweit verbreitetes Standardmesselement
- robust, korrosionsbeständig durch Edelstahlgehäuse
  
- automatische Wetterstationen
  - Meteorologie und Umweltmesstechnik
  - Gebäudetechnik
  - allg. Klimaüberwachung
  - industrielle Messtechnik



## Professional Line

Messelement:  
Messbereich/ Genauigkeit:  
Einsatzbereich:  
Ausgang:

### Varianten:

**00.08241.000 000** (8241)

Einsatzbereich:  
Abmessungen/ Gewicht:

**00.08280.008 503** (828)

Einsatzbereich:  
Abmessungen/ Gewicht:

**00.08281.008 005** (8281)

Einsatzbereich:  
Abmessungen/ Gewicht:

### Zubehör:

**00.08141.400 000**

**32.08141.001 010**

**00.08763.012 002**

## Temperatur-Sensoren

Widerstandsthermometer • Pt 100 1/3 DIN 43760 Klasse B  
-30...+70°C • ± 0.1°C bei 0°C  
Temperaturen -60...+90°C  
Pt 100 in 4-Leiterschaltung

Siehe auch Feuchte-Temperatur-Sensoren (809).

### **Lufttemperatur-Sensor mit Schutzdach**

Grastemperaturen 50 mm über Erdboden  
L 120 mm · Ø 5 mm · Kabellänge 7.5 m · ca. 1 kg inkl. Schutz- und Montageeinrichtung (250 x 60 x 45 mm)

### **Bodentemperatur-Sensor**

Boden- oder Wassertemperaturen  
L 105 mm · Ø 8 mm · Kabellänge 7.5 m · ca. 0.4 kg

### **Lufttemperatur-Sensor**

Lufttemperaturen  
L 120 mm · Ø 5 mm · Kabellänge 7.5 m · ca. 0.3 kg

### **Sensor-Schutzhütte**

Adapter zur Aufnahme des Sensors (8281)

**(8763 TH) Zweikanal-Messumformer** (optional)






## Desert sand and frozen soil...

are the objects to be measured. They are the starting point for the right choice of sensors. The soil sensor (828) is waterproof and is used to measure water and soil temperatures precisely.

Best suited for temperatures of about 5 cm above ground (grass level) is instrument (8241), which includes radiation protection and mounting rod.

For measurement of air temperatures in higher areas, sensor (8281) is best suited.

- world-wide popular standard measuring elements
- robust, corrosion resistant through stainless steel housing
- automatic weather stations • meteorology and environmental measurement technology • building systems • general climate monitoring • industrial metrology

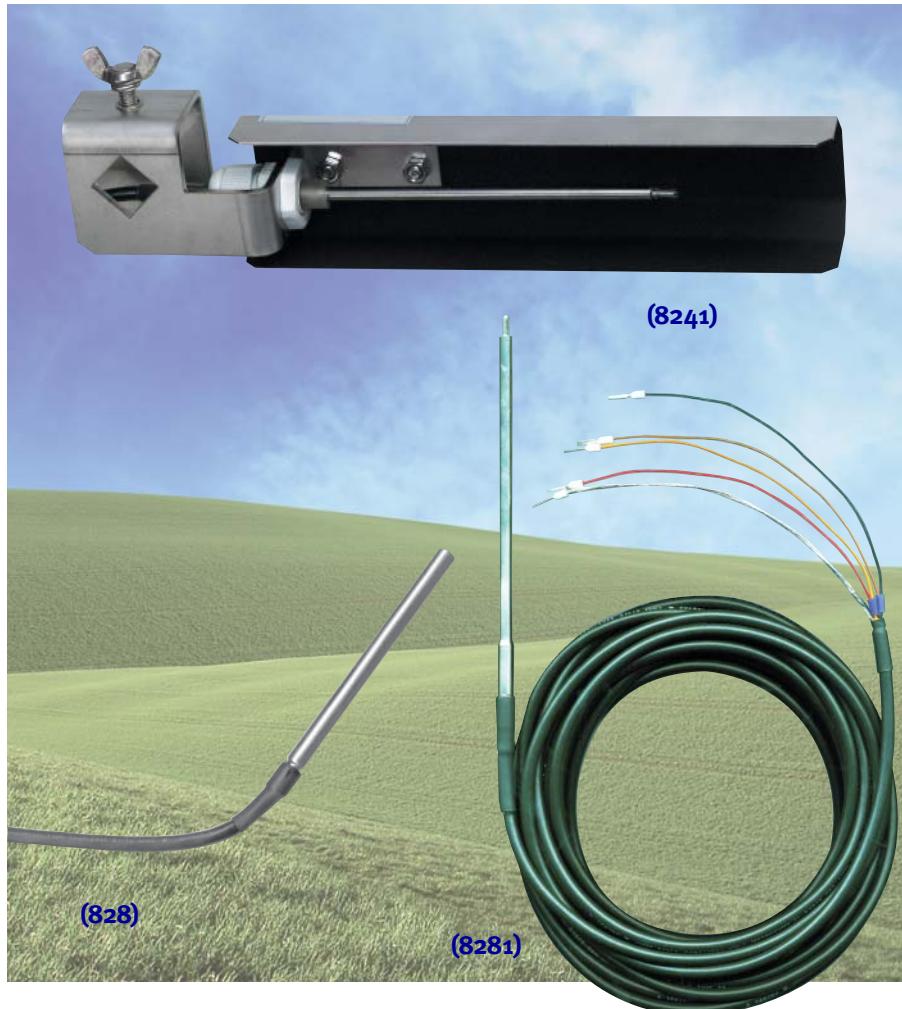

## Professional Line

Measuring element:  
Measuring range/ Accuracy:  
Operating temperature:  
Output:

### Varieties:

**00.08241.000 000** (8241)

Range of application:  
Dimensions/ Weight:

**00.08280.008 503** (828)

Range of application:  
Dimensions/ Weight:

**00.08281.008 005** (8281)

Range of application:  
Dimensions/ Weight:

### Accessories:

**00.08141.400 000**  
**32.08141.001 010**  
**00.08763.012 002**

## Temperature Sensors

platinum thermometer • Pt 100 1/3 DIN 43760 class B  
-30...+70°C • ± 0.1°C at 0°C  
-60...+90°C  
Pt 100 • 4-wire circuit

See also Humidity-Temperature Sensors (809).

**Air Temperature Sensor** with protection roof against radiation

grass temperature 50 mm above ground  
L 120 mm • Ø 5 mm • cable length 7.5 m • approx. 1 kg incl. protection- and installation equipment (250 x 60 x 45 mm)

**Soil Temperature Sensor**

soil- or water temperature  
L 105 mm • Ø 8 mm • cable length 7.5 m • approx. 0.4 kg

**Air Temperature Sensor**

air temperature  
L 120 mm • Ø 5 mm • cable length 7.5 m • approx. 0.3 kg

**(8141.4) Sensor shelter**

Adapter for mounting of sensor (8281)

**(8763TH) Two-channel transducer** (optional)

