




# ASRD 14

## Dreiphasen-Stromwandlersatz



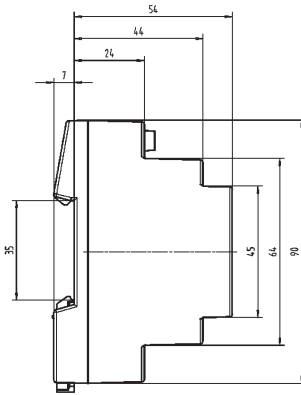


Sekundärstrom		5A		1A	
Primär-Strom A	Bem.-Leist. VA	Genauigkeitsklasse		Genauigkeitsklasse	
		1	0,5	1	0,5
		Best.-Nr.	Best.-Nr.	Best.-Nr.	Best.-Nr.
3 x 50	1	96030		96230	
3 x 60	1,25	96032		96232	
3 x 75	1,5	96034		96234	
3 x 80	1,5	96036		96236	
3 x 100	2,5	96038	96012	96238	96212
3 x 125	2,5	96039	96014		96214
	3,75	96041		96241	
3 x 150	2,5	96040	96017		96217
	3,75	96044		96244	

Primärleiter	—
Rundleiter	3 x Ø 13,5 mm
Wandlerbreite	105 mm
Schnappbefestigung	integriert
Plombierplatte	—

# ASRD 14

## Three-phase current transformer set

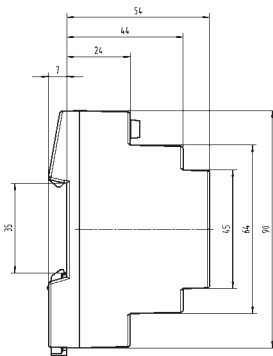

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 50	1	96030		96230	
3 x 60	1.25	96032		96232	
3 x 75	1.5	96034		96234	
3 x 80	1.5	96036		96236	
3 x 100	2.5	96038	96012	96238	96212
3 x 125	2.5	96039	96014	96241	96214
	3.75	96041			
3 x 150	2.5	96040	96017	96244	96217
	3.75	96044			

Primary conductor	—
Round conductor	3 x Ø 13.5 mm
Transformer width	105 mm
Snap-on mounting	integrated
Sealed shutter	—