



passende Einsätze: Seite
CME..... 3p +2 Hilfskontakte + ⊕ 115

Einschraubmaß der Einsätze:
57 x 27 mm

Die Schutzdeckel CHC 10 C/G/LG können nicht verwendet werden, wenn die Einsätze mit Codierbolzen bestückt sind. Auf Anfrage informieren wir Sie gerne über geeignete Schutzdeckel.

**Kupplungsgehäuse ohne Dichtung
 Verschluss mit 2 Bügeln**



**Schutzdeckel
 Verschluss mit Bügel oder Bolzen**




Beschreibung	Artikel- bezeichnung	Ausgang Pg	Artikel- bezeichnung	Ausgang M	Artikel- bezeichnung
mit Bügel, seitlicher Kabelausgang ¹⁾	CMO 03 X	16	MMO 03 X20	20	
mit Bügel, seitlicher Kabelausgang ¹⁾			MMO 03 X25	25	
mit Bügel, seitlicher Kabelausgang, hoch ¹⁾	CMAO 03 X	21	MMAO 03 X32	32	
mit Bügel, seitlicher Kabelausgang, hoch ¹⁾	CMAO 03 X29	29	MMAO 03 X40	40	
mit Bügel, gerader Kabelausgang ¹⁾	CMV 03 X	16	MMV 03 X20	20	
mit Bügel, gerader Kabelausgang ¹⁾			MMV 03 X25	25	
mit Bügel, gerader Kabelausgang, hoch ¹⁾	CMAV 03 X	21	MMAV 03 X32	32	
mit Bügel, gerader Kabelausgang, hoch ¹⁾	CMAV 03 X29	29	MMAV 03 X40	40	
mit 4 Bolzen (für Gehäuse mit 2 Bügeln und Dichtung)					CHC 10
mit 4 Bolzen und Dichtung (für Gehäuse mit 2 Bügeln) ²⁾					CHC 10 C
mit 2 Bolzen (für Gehäuse mit 1 Bügel und Dichtung)					CHC 10 L
mit 2 Bügeln (für Tüllengehäuse mit 4 Bolzen)					CHC 10 G
mit 1 Bügel (für Tüllengehäuse mit 2 Bolzen)					CHC 10 LG

¹⁾ passend zu Gehäusen:
 - CMI/CMP/CMAV 03 CS/CP
 - MMP/MMAV 03 CS/CP


²⁾ passend zu Gehäusen:
 - CMO/CMAO 03 X und CMV/CMAV 03 X
 - MMO/MMAO 03 X und MMV/MMAV 03 X

Abmessungen in mm

CMO X (CMAO X) und MMO X (MMAO X)

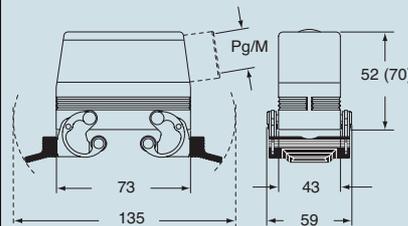

CMV X (CMAV X) und MMV X (MMAV X)

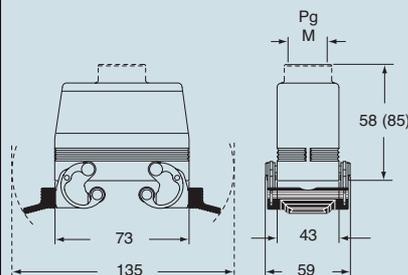


Abmessungen in mm

CHC




CHC C




CHC L



CHC G

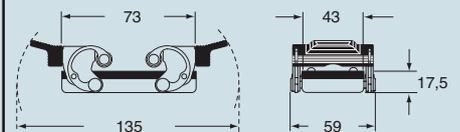

CHC LG

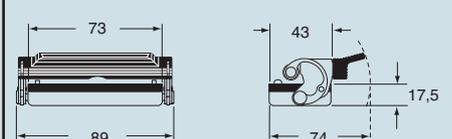

Die angegebenen Abmessungen sind nicht verbindlich.
 Technische Änderungen bleiben vorbehalten.

Größe 57.27



inserts: page
CME3 + 2 (aux) poles + ⊕ 115

insert centre distance:
57 x 27 mm

Covers G and LG version are not suitable to be used with code pins. If this application is required please contact ILME SpA.

hoods with 2 levers



covers




description	part No.		part No.		part No.		
		entry Pg		entry M			
with levers, side entry ¹⁾	CMO 03 X	16	MMO 03 X20	20			
with levers, side entry ¹⁾						MMO 03 X25	25
with levers, side entry, high construction ¹⁾		CMAO 03 X		21		MMAO 03 X32	32
with levers, side entry, high construction ¹⁾		CMAO 03 X29		29		MMAO 03 X40	40
with levers, top entry ¹⁾	CMV 03 X	16	MMV 03 X20	20			
with levers, top entry ¹⁾						MMV 03 X25	25
with levers, top entry, high construction ¹⁾		CMAV 03 X		21		MMAV 03 X32	32
with levers, top entry, high construction ¹⁾		CMAV 03 X29		29		MMAV 03 X40	40
with 4 pegs (for housings with 2 levers with gasket)					CHC 10 CHC 10 C CHC 10 L		
with 4 pegs and gasket (for housings with 2 levers) ²⁾							
with 2 pegs (for housings with 1 lever with gasket)							
with 2 levers (for hoods with 4 pegs)					CHC 10 G CHC 10 LG		
with 1 lever (for hoods with 2 pegs)							

¹⁾ May be combined with housings:
 - CMI/CMP/CMAV 03 CS/CP
 - MMP/MMAV 03 CS/CP


²⁾ May be combined with housings:
 - CMO/CMAO 03 X and CMV/CMAV 03 X
 - MMO/MMAO 03 X and MMV/MMAV 03 X

dimensions in mm

CMO X (CMAO X) and MMO X (MMAO X)

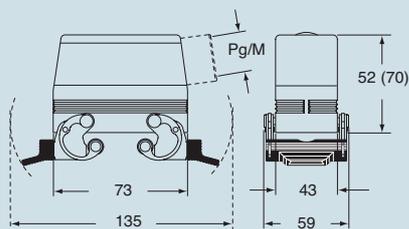

CMV X (CMAV X) and MMV X (MMAV X)

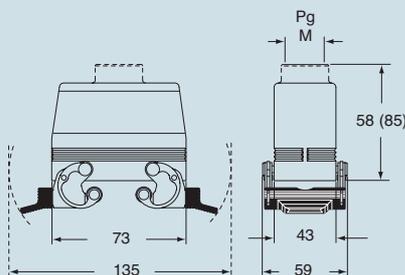


dimensions in mm

CHC




CHC C




CHC L



CHC G

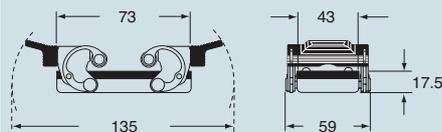

CHC LG

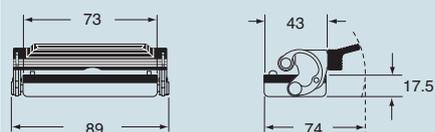

CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 57.27