

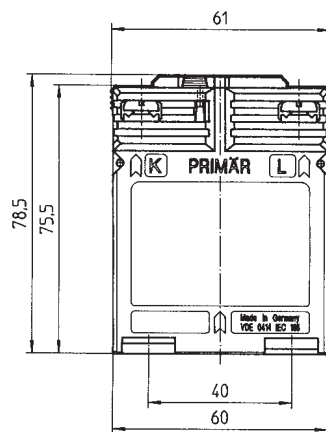



# WSK 30

## Wickel-Stromwandler

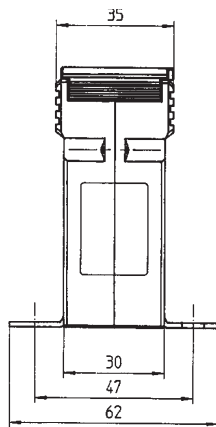

Sekundärstrom		5A		1A	
Primär-Strom A	Bem.-Leist. VA	Genauigkeitsklasse		Genauigkeitsklasse	
		1	0,5	1	0,5
		Best.-Nr.	Best.-Nr.	Best.-Nr.	Best.-Nr.
1	2,5	30017	30011	30217	30211
	5	30018		30218	
2,5	2,5	30019	30012	30219	30212
	5	30020		30220	
5	2,5	30021	30013	30221	30213
	5	30022		30222	
10	2,5	30023	30014	30223	30214
	5	30024		30224	
15	2,5	30025	30015	30225	30215
	5	30026		30226	
20	2,5	30027	30016	30227	30216
	5	30028		30228	




Schnappbefestigung

Primärleiter	—
Rundleiter	—
Wandlerbreite	61 mm
Schnappbefestigung	<b>Best.-Nr. 53011</b> siehe Seite 194
Plombierplatte	<b>Best.-Nr. 59040</b> siehe Seite 195




# WSK 30

Wound current transformer

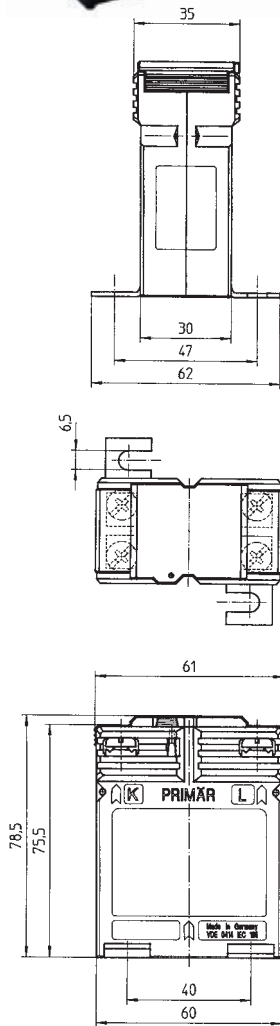

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1	2.5	30017	30011	30217	30211
	5	30018		30218	
2.5	2.5	30019	30012	30219	30212
	5	30020		30220	
5	2.5	30021	30013	30221	30213
	5	30022		30222	
10	2.5	30023	30014	30223	30214
	5	30024		30224	
15	2.5	30025	30015	30225	30215
	5	30026		30226	
20	2.5	30027	30016	30227	30216
	5	30028		30228	



Snap-on mounting

Primary conductor	—
Round conductor	—
Transformer width	61 mm
Snap-on mounting	<b>Art.-no. 53011</b> see page 204
Sealed shutter	<b>Art.-no. 59040</b> see page 205